




TWO WAY LEFT TURN STRIPE:
 4" YELLOW LINES WITH TYPE I BI-DIRECTIONAL YELLOW RAISED PAVEMENT MARKERS AT 40' O.C. OUTSIDE LINE IS SOLID INSIDE AT 10'/30' PATTERN.

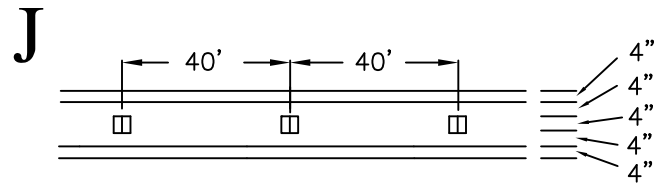


CENTERLINES:
 TWO 4" YELLOW LINES WITH BI-DIRECTIONAL YELLOW TYPE I MARKERS AT 40' O.C.

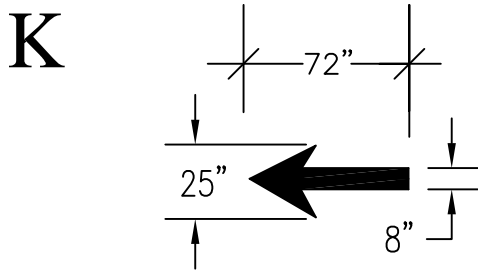


BICYCLE LANE ARROW:
 SEE ODOT BIKE LANE STANDARDS. USE PREFORMED METHYL METHACRYLATE (MMA) PAVEMENT MARKING MATERIAL.

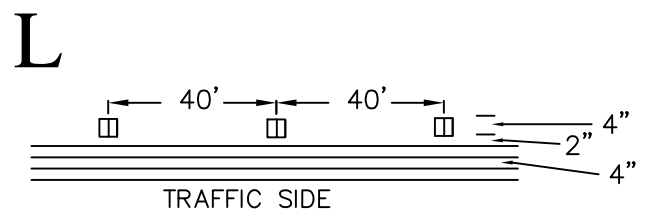

MEDIAN STRIPE:
 TWO 4" YELLOW LINES WITH TYPE I BI-DIRECTIONAL YELLOW RAISED PAVEMENT MARKERS AT 40' O.C.

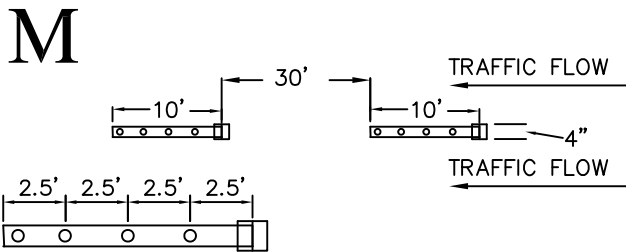


LANE LINE:
 4" WHITE WITH CRYSTAL. TYPE I WHITE MONO-DIRECTIONAL MARKERS AT 40' O.C.

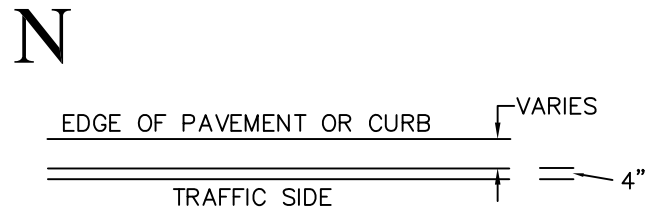


FOG LINE:
 4" WHITE LINE AS SHOWN ON PLANS

O TRAVEL LANE - 8" WHITE STRIPE
 PARKING LANE - 4" WHITE STRIPE
 EDGE OF PAVEMENT OR CURB

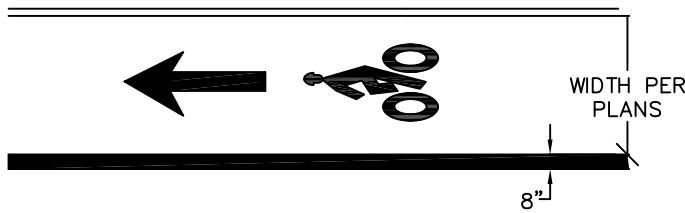

BIKE LANE LINE - 8" WIDE WHITE LINE

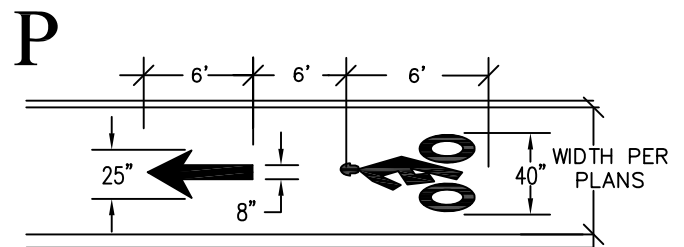

BICYCLE LANE MARKING:
 SEE ODOT BIKE LANE STANDARDS. USE PREFORMED METHYL METHACRYLATE (MMA) PAVEMENT MARKING MATERIAL.

